



SAFETY FOOTWEAR



SAFETY

ALL TERRAIN S1 HRO

Non Metallic Leather Safety footwear

All Terrain is our another stylish non metallic leather safety footwear, offering very high wearer comfort & highest slip resistance, thanks to its lightweight design, tropicalized high-tech materials including composite toe, and ergonomically designed out sole. All Terrain the ideal companion for frequent flyers.

BORN TOUGH BUILT RELIABLE

Upper	Apollo leather
Sole	Double Density PU+Nitrile Rubber Black Outsole
Toecap	Composite
Midsole	PU
Outsole	Nitrile Rubber
Lining	Mesh
Footbed	EVA Footbed
Safety category	EN ISO 20345 : 2011 & IS 15298 (Part 2): 2016
Sample weight	940 gm. ± 50g. Size 8.
Size range	UK 5-12



GENERAL & UPPER

- LEATHER UPPER
- LIGHT WEIGHT
- BREATHABLE UPPER
- LACE UP
- ODOR REDUCING

TOE CAP

- COMPOSITE TOE
- WIDE TOE CAP

LINING

- TEXTILE LINING

IN SOCK

- AERATION HOLES TO REGULAR TEMPERATURE
- CUSHION HEEL & ARCH SUPPORT

SOLE

- DOUBLE DENSITY
- ABSORPTION
- RESISTANT SOLE
- ACID ALKALI FAT RESISTANT SOLE
- ANTISTATIC
- SOLE
- SLIP RESISTANT
- ELECTRICAL HAZARD



SAFETY FOOTWEAR

info@jcbfootwear.in
www.jcbfootwear.in

INDUSTRIAL PROFESSIONAL OCCUPATIONAL

ENGINEERED
IN UK





SAFETY

ALL TERRAIN S1 HRO

Industries:


General, Engineering, Automobile, Foundry, Hot Zone, Electrician

Environments:

Humid environment, Extreme slippery surfaces, Uneven surfaces, upto 350°C

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator/Hair Dryer nor nearby a heat source.

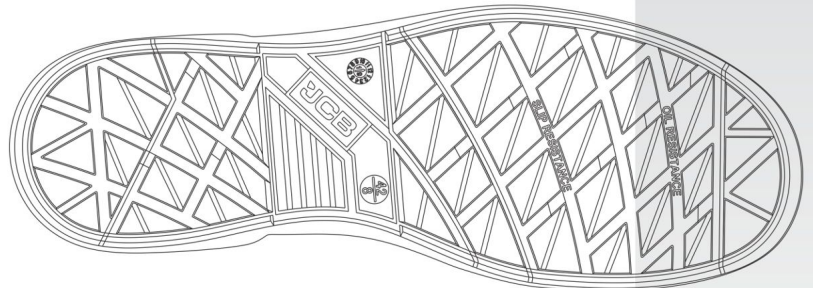

	Description	Measure unit	Result	IS 15298(Part 2):2016 EN ISO 20345
Upper Leather	Upper: Tear Strength	n/mm ²	262	≥ 120
	Upper: Tensile Strength	n/mm ²	26	≥ 15
	Upper: permeability to water vapor	mg/cm ² /h	1.19	≥ 0.8
	Upper: water vapor coefficient	mg/cm ²	17.6	≥ 15
Lining	3D-Mesh			
	Lining: permeability to water vapor	mg/cm ² /h	31.1	≥ 2
	Lining: water vapor coefficient	mg/cm ²	180	≥ 20
Footbed	Footbed			
	Lining: Abrasion resistance	no hole	no hole	no hole
	Footbed: abrasion resistance	cycles	450	≥ 400
Sole	SOLE:PU Nitrile Rubber			
	Outsole abrasion resistance (volume loss)	mm ³	91	≤ 150
	Flexing resistance (30,000 cycles)	mm	no growth	≤ 4
	Upper outsole bond strength	n/mm	4.15	≥ 4.0
	Interlayer bond strength	n/mm	4.05	≥ 4.0
	Outsole slip resistance SRA: heel	friction	0.41	≥ 0.28
	Outsole slip resistance SRA: flat	friction	0.39	≥ 0.32
	Outsole slip resistance SRB: heel	friction	0.17	≥ 0.13
	Outsole slip resistance SRB: flat	friction	0.18	≥ 0.18
	Antistatic value	MegaOhm	125	0.1 - 1000
	Heel energy absorption	Joules	≥30	≥ 20
	Resistance fuel oil	%	≤ 1.6	≤ 12
Toecap	Hot Contact at 130°C for 1 min.	Centigrade	No melt	No melt
	Impact resistance toecap (clearance after impact 200J)	mm	19.5	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	15.0	≥ 14

Our shoes are constantly evolving, the technical data above may change. All product names and brand JCB, are registered and may not be or reproduced in any format, without written consent from us.



SAFETY FOOTWEAR
info@jcbfootwear.in
www.jcbfootwear.in

INDUSTRIAL PROFESSIONAL OCCUPATIONAL

ENGINEERED IN UK

